


A35 HTi Spray Gun - Stainless Steel



Modular designed gun suitable for a wide range of applications

HTi technology delivers high finish quality

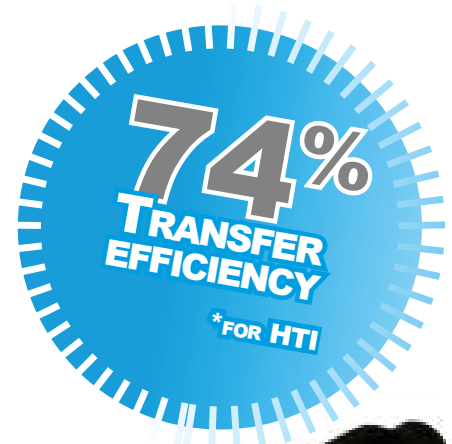

Features	Benefits
Excellent atomization quality with outstanding transfer efficiency	Excellent finish quality, reduced paint costs, cleaner working environment and lower booth maintenance
Modular design	Quick service: only 4 bolts to unscrew, NO HOSES TO REMOVE
Built-in valve	Non air-bleeding gun
Indexed aircap 0 - 90°	Perfect readjustment of fan pattern
Adjustable fluid output from indexed button	High precision fluid regulation
All stainless steel construction	Compatible with water-based materials

Specifications	
Maximum air inlet pressure	90 psi / (6 bar)
Maximum fluid pressure	90 psi / (6 bar)
Trigger air pressure	45 psi / (3 bar mini)
Recommended atomization air pressure	30-75 psi / (2 - 5 bar)
Fluid output	Dependent upon nozzle (see table)
Weight (gun only)	17.53 oz / (497 g)
Maximum fluid temperature	122° F / (50° C)
Transfer efficiency in % (EN 13966-1)	74% (E3 KHVLP) 72% (EP3)
Air consumption	1.77 - 17.66 (cfm) / (20-30 (m3/h))
Wetted parts	Stainless steel - treated stainless steel

Base for A35 HTi Guns		
Type	Side Port Inlet / Outlet	Rear Port Inlet / Outlet
Fluid circulation	Circulation in the base	Circulation in the base
Material (base plate)	Aluminum with stainless steel insert	Aluminum with stainless steel insert
Weight (base only)	8.47 oz / (240 g)	16.93 oz / (480 g)



High Transfer Innovation

High quality finish with high transfer efficiency



A35 HTi Spray Gun - Stainless Steel

Fittings

Description	Gun Base	Fittings
Fluid circulation	F 1/4" NPS	Quick fitting - 6 x 8 hose
Atomization air	F 1/4" NPS	M 1/4" NPS - air hose 8 mini
Pilot air	F 1/8" NPS	Quick fittings - air hose 4 x 6

Configuration of the A35 HTi gun fitted with base - KHVLP aircap

Description	Base Type	Nozzles	Aircap	Fan Width		Fluid Output	Part Number
				Minimum	Maximum		
A35 HTi	Side Outputs	0.026 in (0.6 mm)	06 E3 KHVLP	3.9 in (10 cm)	9.84 in (25 cm)	5.3oz/min (150 cc/min)	135.300.112
		0.027 in (0.7 mm)	07 E3 KHVLP	3.9 in (10 cm)	11.41 in (29 cm)	7.0oz/min (200 cc/min)	135.300.101
		0.035 in (0.9 mm)	09 E3 KHVLP	3.9 in (10 cm)	13.78 in (35 cm)	8.3oz/min (250 cc/min)	135.300.102
		0.047 in (1.2 mm)	12 E3 KHVLP	3.9 in (10 cm)	14.96 in (38 cm)	10.6oz/min (300 cc/min)	135.300.103
		0.059 in (1.5 mm)	15 E3 KHVLP	3.9 in (10 cm)	16.14 in (41 cm)	12.4oz/min (350 cc/min)	135.300.104
A35 HTi	Rear Outputs	0.070 in (1.8 mm)	18 E3 KHVLP	3.9 in (10 cm)	16.93 in (43 cm)	14.0oz/min (400 cc/min)	135.300.105
		0.026 in (0.6 mm)	06 E3 KHVLP	3.9 in (10 cm)	9.84 in (25 cm)	5.3oz/min (150 cc/min)	135.300.212
		0.027 in (0.7 mm)	07 E3 KHVLP	3.9 in (10 cm)	11.41 in (29 cm)	7.0oz/min (200 cc/min)	135.300.201
		0.035 in (0.9 mm)	09 E3 KHVLP	3.9 in (10 cm)	13.78 in (35 cm)	8.3oz/min (250 cc/min)	135.300.202
		0.047 in (1.2 mm)	12 E3 KHVLP	3.9 in (10 cm)	14.96 in (38 cm)	10.6oz/min (300 cc/min)	135.300.203
A35 HTi	Rear Outputs	0.059 in (1.5 mm)	15 E3 KHVLP	3.9 in (10 cm)	16.14 in (41 cm)	12.4oz/min (350 cc/min)	135.300.204
		0.070 in (1.8 mm)	18 E3 KHVLP	3.9 in (10 cm)	16.93 in (43 cm)	14.0oz/min (400 cc/min)	135.300.205

Configuration of the A35 HTi gun fitted with base - EP3 aircap

Description	Base Type	Nozzles	Aircap	Fan Width		Fluid Output	Part Number
				Minimum	Maximum		
A35 HTi	Side Outputs	0.026 in (0.6 mm)	06 EP3	3.9 in (10 cm)	9.44 in (24 cm)	5.3oz/min (150 cc/min)	135.300.111
		0.027 in (0.7 mm)	07 EP3	3.9 in (10 cm)	9.84 in (25 cm)	7.0oz/min (200 cc/min)	135.300.106
		0.035 in (0.9 mm)	09 EP3	3.9 in (10 cm)	12.20 in (31 cm)	8.3oz/min (250 cc/min)	135.300.107
		0.047 in (1.2 mm)	12 EP3	3.9 in (10 cm)	12.60 in (32 cm)	10.6oz/min (300 cc/min)	135.300.108
		0.059 in (1.5 mm)	15 EP3	3.9 in (10 cm)	13.38 in (34 cm)	12.4oz/min (350 cc/min)	135.300.109
A35 HTi	Rear Outputs	0.070 in (1.8 mm)	18 EP3	3.9 in (10 cm)	14.96 in (38 cm)	14.0oz/min (400 cc/min)	135.300.110
		0.026 in (0.6 mm)	06 EP3	3.9 in (10 cm)	9.44 in (24 cm)	5.3oz/min (150 cc/min)	135.300.211
		0.027 in (0.7 mm)	07 EP3	3.9 in (10 cm)	9.84 in (25 cm)	7.0oz/min (200 cc/min)	135.300.206
		0.035 in (0.9 mm)	09 EP3	3.9 in (10 cm)	12.20 in (31 cm)	8.3oz/min (250 cc/min)	135.300.207
		0.047 in (1.2 mm)	12 EP3	3.9 in (10 cm)	12.60 in (32 cm)	10.6oz/min (300 cc/min)	135.300.208
		0.059 in (1.5 mm)	15 EP3	3.9 in (10 cm)	13.38 in (34 cm)	12.4oz/min (350 cc/min)	135.300.209
A35 HTi	Rear Outputs	0.070 in (1.8 mm)	18 EP3	3.9 in (10 cm)	14.96 in (38 cm)	14.0oz/min (400 cc/min)	135.300.210

Configuration of the A35 HTi gun fitted without nozzle, without base

Description	Aircap	Nozzle	Part Number
A35 HTi without nozzle, without base	-	-	129.300.00

www.exel-na.com

EXEL North America, Inc.
 North American Headquarters
 45001 5 Mile Road
 Plymouth, MI 48170
 Toll Free: (800) 573-5554
 Phone: (734) 979-0100
 Fax: (734) 927-0064

EXEL North America, Inc.
 Canadian Branch
 931 Progress Ave., Unit 7
 Scarborough, Ontario M1G 3V5
 Toll Free: (800) 450-0655
 Phone: (416) 431-5017
 Fax: (416) 431-9171

EXEL-NA, S.A. DE C.V.
 Mexico Branch
 Moisés Sáenz 1510, Col. Leones
 Monterrey, N. L. México, CP 64600
 Phone: (81) 1257-1111
 Fax: (81) 1352-8316